



# Connecting 6000-series electric track

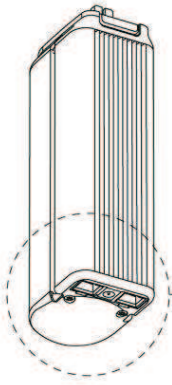


- > 6200/ 6300 /6302/ 6500
- > standard power supplies
- > for operation using:
  - momentary switch
  - relay



## 1 x connector for 24V DC power plug


- > for 6200
- > for 6500
- > 2,1 A

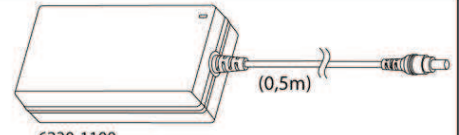

6230-1100


(4m)

- > also available in UK version





6230-1200-EU

- > for 6300
- > for 6302
- > 0,8 A

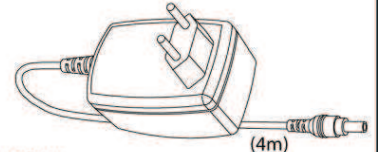

6330-1000-EU

## 2 x connector for RJ45 plug:



connect wires necessary only

## Switching

0	Open and close should not be activated simultaneously. If so, the motorunit will switch to the programming mode;	0	Bounce time lower than 0,04 sec required.
0	pulse < 1,2 sec: - automatic complete open/close - stop	0	The switching current is +/- 5,5mA;
0	pulse > 1,2 sec: the system runs until button is released	0	24V out pin2 and pin4: max. 2,4VA
		0	Potential free switching only

230 VAC

